

# IS 3360 MX Highbay

DALI-2 IPD - surface, sq.  
EAN 4007841 057374



infrared sensor  
360°



18 m



IP54



2 - 1000 lux



ideal 4 - 14 m



energy saving



manufacturer's  
warranty  
steinel-professional.de/garantie



CE

## Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version. DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems.

## Technical specifications

Type	Motion detectors
Dimensions (L x W x H)	65 x 95 x 95 mm
Mains power supply	12 – 22,5 V
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	high-bay warehouse, sports hall, Indoors
Installation site	ceiling
Installation	Surface wiring
Switching zones	1416 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	4,00 – 14,00 m
Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	45 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	Ø 14 m (154 m <sup>2</sup> )

Reach, tangential	Ø 36 m (1018 m <sup>2</sup> )
Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Switching output 1, floating	No
Control output, Dali	Addressable/slave
Basic light level function	No
With bus coupling	Yes
Settings via	Bus
With remote control	No
Interconnection	Yes
IP-rating	IP54
Material	Plastic
Ambient temperature	-20 – 50 °C
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	DALI-2 IPD - surface, sq.
PU1, EAN	4007841057374


# IS 3360 MX Highbay

DALI-2 IPD - surface, sq.  
EAN 4007841 057374

## Accessories


EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 056711	Black cover for IR-sensors

## Detection Zone

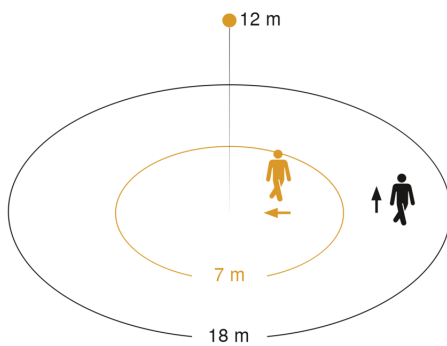

Mögliche Montagehöhe: 4,00 m – 14,00 m  
Orange: radial  
Schwarz: tangential

## Dimension Drawing

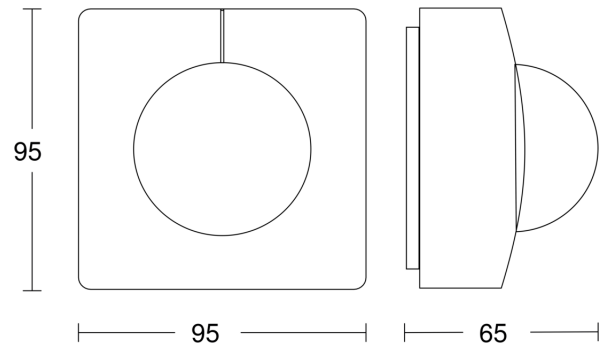

## Circuit diagram

